

Rules for the use of windows and balcony doors

1. Cleaning frames, sashes and glass panes

PVC surfaces are to be cleaned with a soft cloth or a sponge with a mild liquid cleaning agent, e.g. Ludwik, Cif, Window, etc., without an abrasive powder. It is not allowed to use aggressive chemical agents (e.g. solvents, diluents, etc.) apart from gasoline extract. Windows soiled with asphalt resin, wood impregnating agents, soot, shellac, etc. can be removed by special cleaning and maintenance agents, which can be bought at the TERMO PROFIL manufacturing plant.

Attempts to paint windows or doors are unacceptable – the Manufacturer shall not be held liable for the results. Glass panes should be cleaned with cleaning liquids and agents commonly used for this purpose.

2. Maintenance of fittings

Top quality materials and the precision of craftsmanship of WinHause automobile Pilot fittings used in Termo Profil windows guarantee long-lasting, reliable operation and comfort of use.

In order to keep windows in the proper technical condition, periodic oiling (at least once a year) of the slide elements of the fittings and fixed elements in the frame is recommended (the agent is available at our company), protecting them against premature wear and guarantees smooth operation.

Motor lubricants and oils are not to be used. The cleaning agents used may not destroy anti-corrosion coating of the fitting. Fittings should be protected against soiling and painting.

3. Maintenance of window seals

It is recommended to provide maintenance to window seals at least twice a year by applying a rubber care agent (available from our company).

The agent protects the seal against freezing, “acid rain” and UV radiation.

4. Air inlets - should be kept clean.

1. Fittings Care Tips

Schematic diagram of the lubrication system

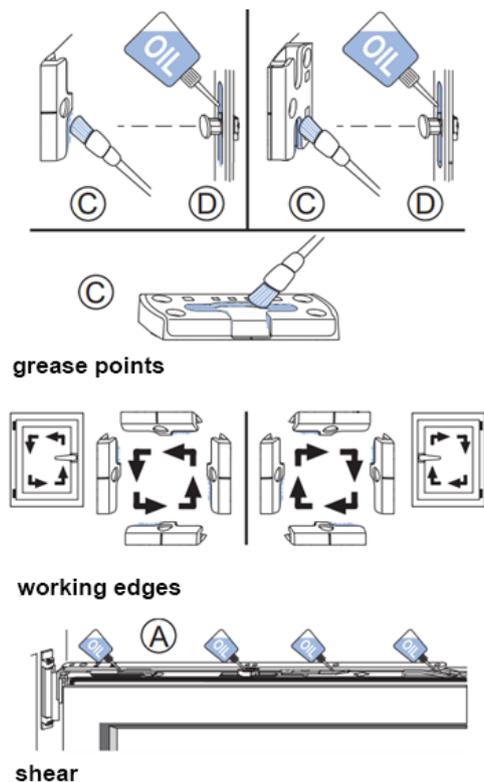
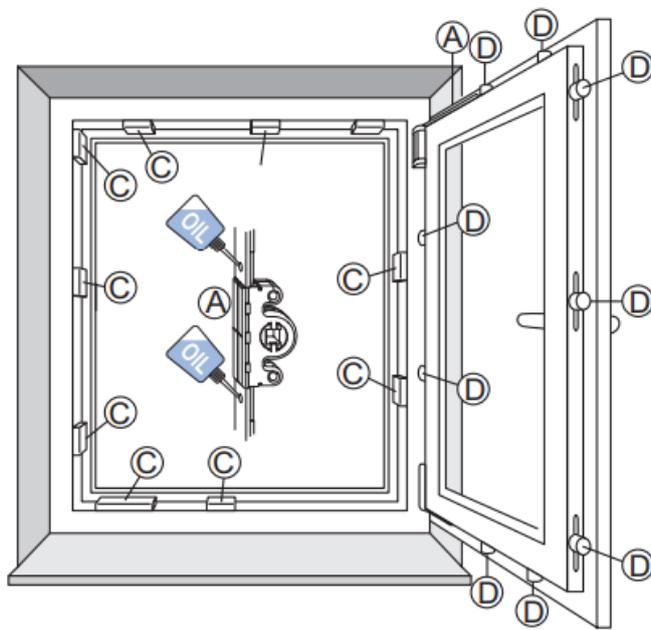


Figure 1 shows possible lubrication points that should be lubricated at least once per year.

Points A, C, D = points where lubrication is necessary for the proper functioning of the fitting.

See figure - **Grease points:**

In order to maintain the smooth operation of the fitting, the catches should be lubricated at least once a year with a special grease. - the catches (C) should be maintained on their working edges with a suitable grease - the working surfaces of the octagonal bolts (D) should be lubricated with oil free of resins and acids.

See figure - **Shear:**

The shear should be lubricated at least once a year in all places interacting with the shear arm using special fittings oil.

FINAL REMARKS:

Failure to comply with the recommendations contained in these instructions leads to numerous faults, which prevent proper operation of the products - PVC windows and doors and results in a loss of the guarantee.